



## Sensormatic® Ultra•Exit 2M Acrylic

The Sensormatic® Ultra•Exit 2M Acrylic provides retailers with an aesthetic, high performance Ultra•Max® EAS protection over wide exits.

High quality acrylic construction and straight edge form ensures the antenna blends into store openings while still providing a visual deterrent.

Accurate and consistent performance is provided by the Ultra•Max 9050 Controller. This detection platform uses parallel resonance technology, the latest DSP and efficient power management to deliver high level performance and functionality.

### Features:

- **Aesthetic, modern design** matches the highest store aesthetic requirements
- **Up to 8 metre coverage from one controller** with 2 metre coverage between pedestals.
- **Ultra•Max 9050 Controller platform** provides advanced DSP, connectivity, efficient power management, software controlled system configuration, separate alarm relays and up to four transceivers from one controller.
- **Base Options** including high impact ABS and stainless steel for different applications.
- **Audible and visual alarms** provide notification of identified events.
- **SmartEAS Options** include people counting sensors integrated to the alarm lens and alarm counting.
- **Ultra•Max Detection** for the range of Sensormatic® hard tags and labels.

Specifications

**Transmitter**

Operating Frequency 58kHz  
 (±200Hz)  
 Transmit Burst Duration 1.6ms  
 Max. Transmit Current 16A peak  
 Burst Repetition Rate  
 Based on 50Hz ac 75Hz or 37.5Hz  
 Based on 60Hz ac 90Hz or 45Hz

**Receiver**

Center Frequency 58kHz  
 Receive Coil Resistance 1.6 ohms  
 (±5%)

**Alarm**

Audio level 83dBA

**Environmental**

Ambient Temperature 0°C to 50°C  
 (32°F to 122°F)  
 Relative Humidity 0 to 90%  
 Non-condensing

**Mechanical**


Height 155cm (61in)  
 Width 49.2cm (19.4in)  
 Thickness (with base covers) 12.5cm (4.9in)  
 Weight (with base covers) 25.7kg (56.7lbs)

**Regulatory Compliance**

EMC 47 CFR, Part 15  
 ETSI EN 300 330  
 ETSI EN 301 489  
 RSS-310  
 Safety UL 60950-1  
 CSA C22.2 No.60950-1  
 EN 60950-1

**Product Compatibility**

The Ultra•Exit 2M Acrylic is powered by the Ultra•Max® 9050 Controller.

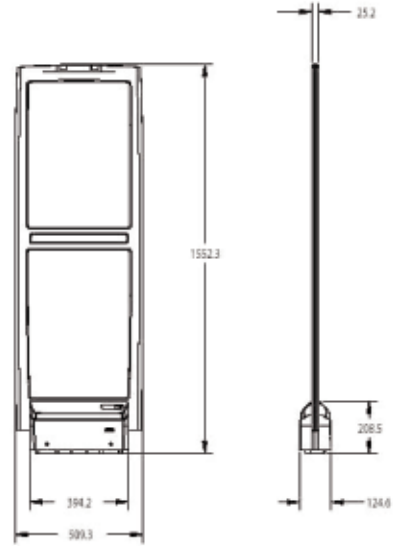

Ultra•Max® EAS systems are designed to detect the range of Sensormatic® tags and labels. Specification for performance is based on the Ultra•Strip III label.

**Antenna Product Code**

ZS1102 . . . . . Ultra•Exit 2M Acrylic

**Antenna Option Product Codes**

ZPUE-PLBASE . . . . Ultra•Exit Base Cover - Dark Grey  
 ZPUE-PLBASE-MS . . Ultra•Exit Base Cover - Silver Grey  
 ZPUE-SSBASE1 . . . Ultra•Exit Stainless Steel Base Cover  
 ZPUE-SSBASE2 . . . Ultra•Exit Stainless Steel Base Cover (square)  
 ZPUE-TRAFFICNTR Ultra•Exit Traffic Counting Sensor Set  
 ZPUE-ALMCNTR. . . Ultra•Exit Alarm Counter Kit

**Controller Product Code**

ZE9050 . . . . . Ultra•Max 9050 Controller