



Sensormatic® Ultra•Exit 2M Acrylic

The Sensormatic® Ultra•Exit 2M Acrylic provides retailers with an aesthetic, high performance Ultra•Max® EAS protection over wide exits.

High quality acrylic construction and straight edge form ensures the antenna blends into store openings while still providing a visual deterrent.

Accurate and consistent performance is provided by the Ultra•Max 9050 Controller. This detection platform uses parallel resonance technology, the latest DSP and efficient power management to deliver high level performance and functionality.

Features:

- **Aesthetic, modern design** matches the highest store aesthetic requirements
- **Up to 8 metre coverage from one controller** with 2 metre coverage between pedestals.
- **Ultra•Max 9050 Controller platform** provides advanced DSP, connectivity, efficient power management, software controlled system configuration, separate alarm relays and up to four transceivers from one controller.
- **Base Options** including high impact ABS and stainless steel for different applications.
- **Audible and visual alarms** provide notification of identified events.
- **SmartEAS Options** include people counting sensors integrated to the alarm lens and alarm counting.
- **Ultra•Max Detection** for the range of Sensormatic® hard tags and labels.

Specifications

Transmitter

Operating Frequency 58kHz
 (±200Hz)
 Transmit Burst Duration 1.6ms
 Max. Transmit Current 16A peak
 Burst Repetition Rate
 Based on 50Hz ac 75Hz or 37.5Hz
 Based on 60Hz ac 90Hz or 45Hz

Receiver

Center Frequency 58kHz
 Receive Coil Resistance 1.6 ohms
 (±5%)

Alarm

Audio level 83dBA

Environmental

Ambient Temperature 0°C to 50°C
 (32°F to 122°F)
 Relative Humidity 0 to 90%
 Non-condensing

Mechanical


Height 155cm (61in)
 Width 49.2cm (19.4in)
 Thickness (with base covers) 12.5cm (4.9in)
 Weight (with base covers) 25.7kg (56.7lbs)

Regulatory Compliance

EMC 47 CFR, Part 15
 ETSI EN 300 330
 ETSI EN 301 489
 RSS-310
 Safety UL 60950-1
 CSA C22.2 No.60950-1
 EN 60950-1

Product Compatibility

The Ultra•Exit 2M Acrylic is powered by the Ultra•Max® 9050 Controller.

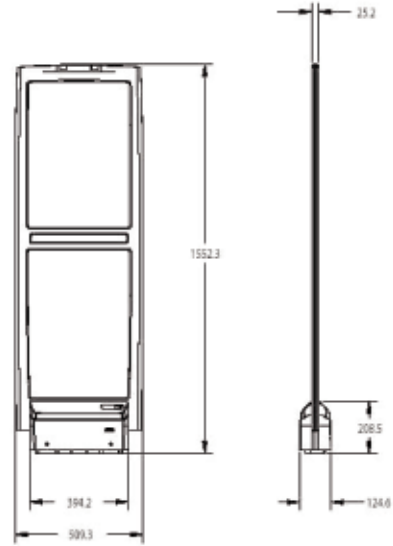

Ultra•Max® EAS systems are designed to detect the range of Sensormatic® tags and labels. Specification for performance is based on the Ultra•Strip III label.

Antenna Product Code

ZS1102 Ultra•Exit 2M Acrylic

Antenna Option Product Codes

ZPUE-PLBASE Ultra•Exit Base Cover - Dark Grey
 ZPUE-PLBASE-MS . Ultra•Exit Base Cover - Silver Grey
 ZPUE-SSBASE1 . . . Ultra•Exit Stainless Steel Base Cover
 ZPUE-SSBASE2 . . . Ultra•Exit Stainless Steel Base Cover (square)
 ZPUE-TRAFFICNTR Ultra•Exit Traffic Counting Sensor Set
 ZPUE-ALMCNTR. . . Ultra•Exit Alarm Counter Kit

Controller Product Code

ZE9050 Ultra•Max 9050 Controller